

## Included Hardware:

### 8-Bay Locker

QTY 2 KwikBoost Standard Replacement Cable Bundle:

- 6 USB Type-C cables
- 4 Micro-USB cables
- 6 Apple Lightning cables
- 4 Zip ties

### 10-Bay Locker

QTY 2 KwikBoost Standard Replacement Cable Bundle:

- 6 USB Type-C cables
- 4 Micro-USB cables
- 6 Apple Lightning cables
- 4 Zip ties

Plus the following cables, individually sold:

- 2 Apple Lightning cables
- 1 USB Type-C cable
- 1 Micro-USB cable
- 2 Zip ties (not included)

## Required Tools:



Rear Access Panel Door Key  
(supplied with Locker)



Wire Cutters  
(or scissors)

## Assembly:

- 1 Unplug the Charging Locker from the wall outlet.



- 2 Access the electronics by unlocking and opening the door located on the back of the locker.

**TIP:** Before proceeding to Step 3, take photos of the cable routing and zip tie placement for future reference.



- 3 Unplug the charging cables from the charging modules.


**NOTE:** Your charging module may differ slightly in appearance from the example shown in the photo.



Need more info?

kwikboost.com | 800.676.4278 | support@kwikboost.com

- 4 Use the wire cutter to remove the zip ties securing the old cables. Then, remove the old cables by sliding them out of the cable holes.

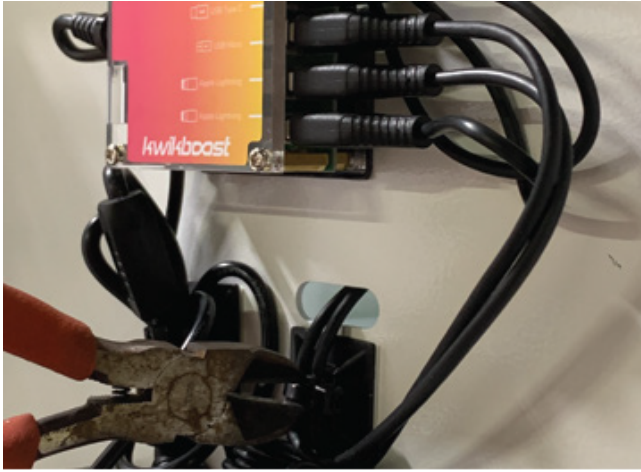

- 5 Plug the replacement cables into the charging modules, secure the cables with zip ties, and then route the cables through the cable holes into the charging lockers.



## Cable Routing and Selection:

An 8-bay locker will feature three charging modules and 16 cables. A 10-bay locker will feature four charging modules and 20 cables.

Unless otherwise specified by the customer, lockers ship from the factory with two cables routed into each locker bay and will feature the mix of cable types outlined below.

This is strictly a guideline. Depending on your unique device charging needs, you may want to customize the mix of cables and/or the number of cables routed to each locker bay.

### 8-Bay

- Bay 1: Lighting, USB Type-C
- Bay 2: Lighting, Micro-USB
- Bay 3: Lighting, USB Type-C
- Bay 4: Micro-USB, USB Type-C
- Bay 5: Lighting, USB Type-C
- Bay 6: Lighting, Micro-USB
- Bay 7: Lighting, USB Type-C
- Bay 8: Micro-USB, USB Type-C

### 10-Bay

- Bay 9: Lighting, USB Type-C
- Bay 10: Lighting, Micro-USB

Need more info?

kwikboost.com | 800.676.4278 | support@kwikboost.com